


True Turf

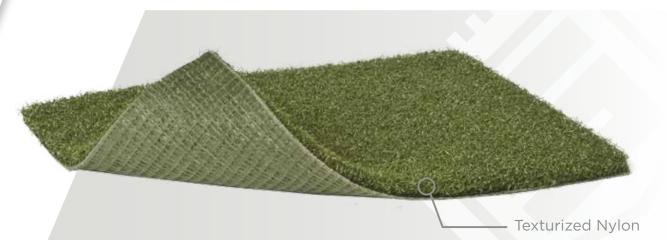

PL308 DESCRIPTION PROPERTY Primary/Stalk Yarn Polymer Nylon PRESSURE TREATED 2X4 ANCHOR TO CONCRETE CURB W/1/2"Ø STAINLESS STEEL EXPANSION ANCHORS SUBGRADE @ .5% RDS COLLECTOR TRENCH TEXTILE FABRIC, /ER ENTIRE SUBGRADE RESILIENT SURFACING Yarn Cross Section Texturized Nylon ANEL DRAIN TURF SYSTEM 2" DEPTH 1/4"-3/8" CLEAN AGGREGATE Standard Color Forest Green 4" DEPTH 3/4" TURF AGGREGATE **UV Stabilized** Yes 8" FLYASH UNDER TURF GRAVEL **Fabric Construction** Tufted 6" X 12" CONC. C 9" PERFORATED COLLECTOR SUB-DRAIN COMPACTED SUBGRADE 6″ MIN * 6″ MI∿ TOR MIN MIN COMPACTED SUBG **Primary Backing** Dual Layered Woven Polypropylene CURB **Coating Type** Greenback or Natural Rubber EXISTING EQUIPMENT Perforations No FOUNDATION GRADE LUMBER OR RECYCLED PLASTIC. ATTACH WITH S.S CONCRET SCREWS & WASHERS @ 18" O.C. Polypropylene Yarn Denier/Ends 4400/8 -INFILLED SYNTHETIC TURF SYSTEM **Recommended Infill** N/A THOROUGHLY COMPACTED MATERIAL AT EDGE FREE DRAINING FINISHING STONE, LASER GRADE ONLY **Pile Height** ³∕8" FREE DRAINING BASE STONE **Pile Weight** 36 oz. GEOTEXTILE FABRIC

APPLICATION

This is a very versatile product that can be used for numerous applications. It is an excellent putting surface that provides a very realistic roll with natural speed. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.













COMPACTED SUBGRADE

*Custom colors available upon request

200 Howell Dr. Dalton GA 30721

www.sporturf.com

```
800.798.1056
```

EQUIPMENT



TESTING

TRUE TURF PL308

| FINISHED FABRIC | ENGLISH SYSTEM | | METRIC | SYSTEM | ASTM TEST |
|------------------------------|----------------|--------|--------|-----------|-----------|
| Nominal Specification | Value | Units | Value | Units | Method |
| Pile Height (Nominal) | .375 | In. | 9.53 | mm. | D-5823 |
| Face Weight | 36 | oz/yd² | 1,221 | g/m² | D-5848 |
| Total Fabric Weight | 84 | oz/yd² | 2,848 | g/m² | D-5848 |
| Primary Backing Weight | 7.4 | oz/yd² | 251 | g/m² | D-5848 |
| Secondary Coating Weight | 41 | oz/yd² | 1390 | g/m² | D-5848 |
| Grab Tear Strength (Average) | >200 | lbs. | >91 | kg. | D-2256 |
| Lead Content | <50 | ppm | <50 | ppm | D-2765 |
| Total Yarn Linear Density | 4,400 | Denier | 4,889 | D-Tex | D-1577 |
| Stitch Rate | 26.5 | Per 3" | 34.715 | Per 10 cm | D-5793 |
| Machine Gauge | 3/16" | In. | .48 | cm | D-5793 |
| Flammability | TEST | PASSED | TEST | PASSED | D-2859 |
| Water Permeability w/Infill | >30 | In/hr | >76 | cm/hr | F-1551 |
| Fabric Width | 15 | Ft. | 4.6 | М | None |



It is the policy of SporTurf[™] to continuously improve it line of products. Therefore, SporTurf[™] reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.